

- Information



Fars Credit Card Company
www.telecomtender.com



Prod.

Grounding Kits WA , 1/2" , 7/8"

Prod No.

FC-GK-12-WA ◊ FC-GK-78-WA

Application and Properties:

A grounding kit diverts transient currents from lightning off the transmission line to an earth grounding system to prevent damage to cable and radio equipment.

- Other Details


- Protect the coax from the damaging effects of lightening current in excess of 100 KA.
- Using one-piece design which simplifies installation by eliminating the need for time consuming sealing tapes and mastic (Easy installation, self-sealing)
- Using spring-finger contact surface to maximize performance by increasing contact area of bonding conductor with feeder
- Waterproof according to IP68
- Resistance to corrosion, UV and extreme weather environments.

- Technical Specification

Feeder cable, nominal size	1/2 or 7/8 (in)
Cable Type	1*16 ,(Available in different length)
Color wire	Black
Bonding Conductor , Material	Stainless steel 304
Bonding Conductor Jacketing, Material	EPDM
Spring-finger contact surface, Material	Tinned copper
Lug Attachment	Factory attached 1 hole M10*16
Lug Type	Two hole lug
Package Quantity	6 (normally)
Weatherproofing Method	Self-sealing

Grounding Kits WA , 1/2 " :

Bonding Conductor

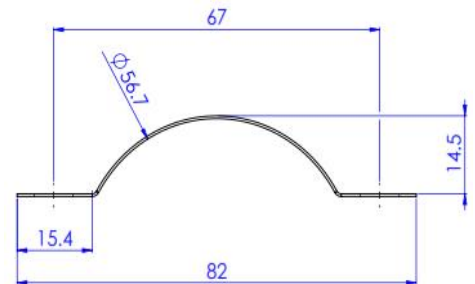

Spring-finger
contact surface

